EKX-15S




- 1600 W (peak), 133 dB SPL utilizing high-sensitivity transducers designed and engineered by EV.
- Lightweight, compact 15-mm wood enclosure with internal bracing and durable EVCoat finish.
- Large slot ports for low distortion and excellent bass extension.
- Metal grille reinforcement bar.
- M20 threaded pole mount plate.

The EKX series is the newest member of the Electro-Voice portable loudspeaker family, and combines legendary EV sound quality and reliability with the latest technology — all in a compact package suitable for a wide range of sound reinforcement scenarios, including musicians/DJs and live/club/installed sound applications. The EKX series features eight (8) models (four (4) powered and four (4) passive), including 12-inch and 15-inch two-way models and 15-inch and 18-inch subwoofers. EKX-15S delivers up to 133 dB SPL utilizing high-sensitivity transducers designed and engineered by EV (15-inch EVS-15C subwoofer).

EKX passive models are ideal for portable and installed applications, with lightweight and compact 15-mm wood enclosures with internal bracing, durable EVCoat finish, aluminum pole-mounts, and all-metal handles.

Technical specifications

| Frequency Response (-3 dB): | 60 Hz - 100 Hz ¹ |
|-----------------------------|-------------------------------|
| Frequency Range (-10 dB): | 40 Hz - 300 Hz ¹ |
| Axial Sensitivity: | 95 dB ¹ |
| Maximum SPL: | 133 dB ² |
| Rec. High-Pass Frequency: | 35 Hz |
| Power Handling: | 400 W continuous, 1600 W peak |
| LF Transducer: | EVS-15C 381 mm (15 in) |
| Nominal Impedance: | 8 Ohms |
| | |




| Minimum Impedance: | 7.5 Ohms |
|-------------------------|---|
| Connectors: | Dual NL4 |
| Enclosure: | 15 mm plywood with EVCoat |
| Grille: | 18 AWG steel with powdercoat |
| Dimensions (H x W x D): | 455 in x 530 mm x 551 mm (18 in x 21 in x 22 in) |
| Net Weight: | 24.9 kg (55.0 lb) |
| Shipping Weight: | 31.3 kg (69.0 lb) |
| | |


- 1. Half Space Measurement.
- 2. Maximum SPL is measured at 1 m using broadband pink noise at rated peak power rating.

System overview

Frequency response:



Dimensions:

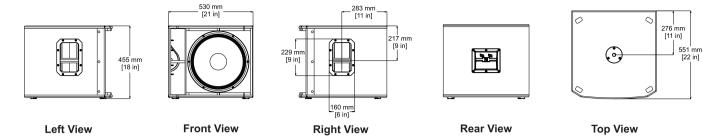

Ordering information

EKX-15S

Passive 15-inch subwoofer, black Order number **EKX-15S**

EKX-15S-AP

Passive 15-inch subwoofer Asia-Pacific regions, black Order number **EKX-15S-AP**

Accessories

EKX-15S Cover

Padded cover for EKX-15S/15SP, EV logo, black Order number **EKX-15S-CVR**

Represented by:

Germany

Bosch Sicherheitssysteme GmbH Robert-Bosch-Ring 5 85630 Grasbrunn Germany Bosch Security Systems, Inc. 12000 Portland Avenue South Burnsville MN 55337 USA

www.electrovoice.com